

**Bridex, leads the way to excellent breeder performance!**



**Bridex**<sup>®</sup>  
EXCELLENCE IN FEEDING

- Simple and robust feeding system
- Grill design allows easy access for females, excludes males
- Suitable for straight line (45 mm.) and circular (60 mm.) systems
- Easy feed level adjustment
- Choice of 3 adjustable height settings for male exclusion
- Easy to clean
- Simultaneous filling with circular system
- Automatic winching system


**New**

**VDL Agrotech**




# Bridex, leads the way to excellent breeder performance!

## Circular feeding system

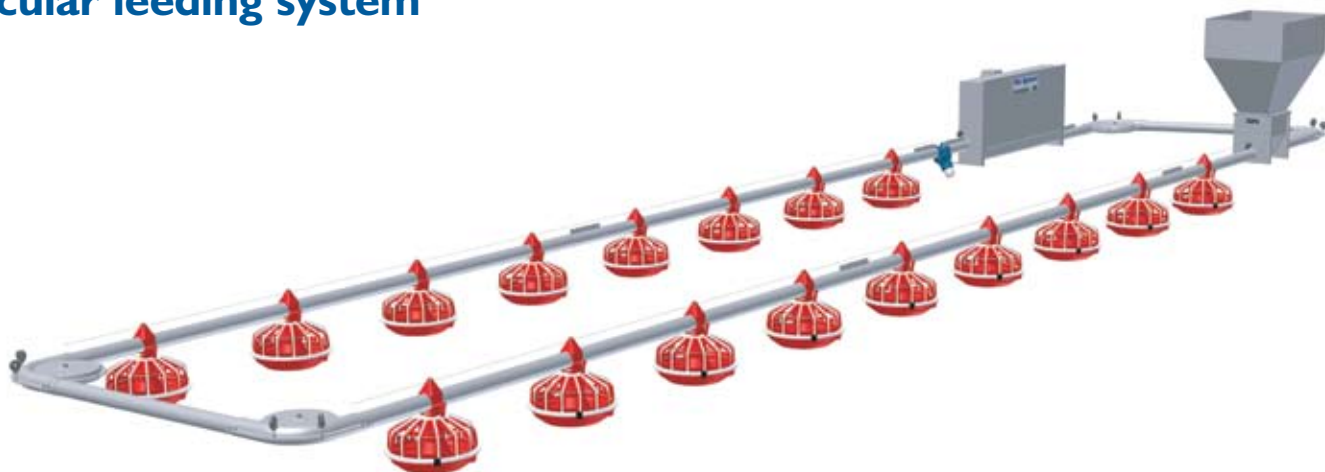

## Straight line system

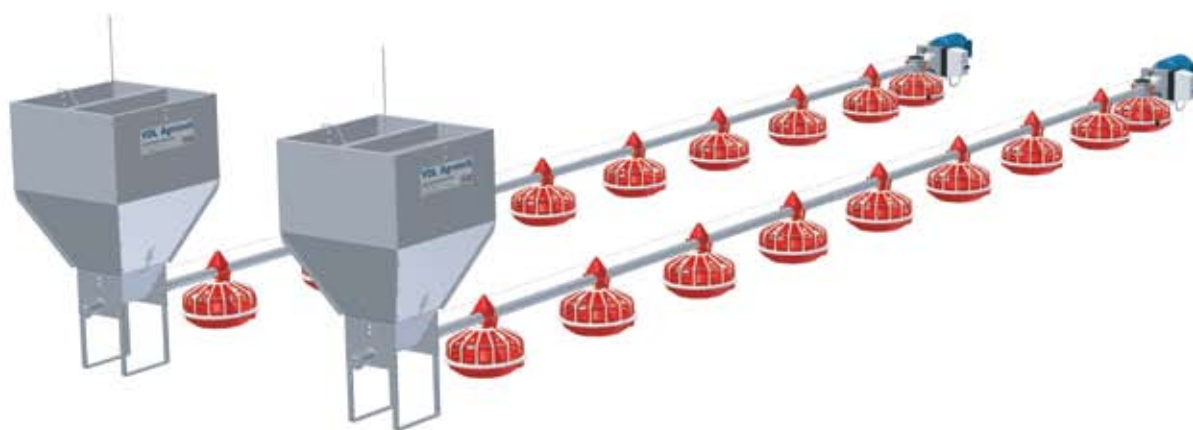

### Technical specifications

	Straight line system Ø 45mm	Circular feeding system Ø 60 mm
Motor power/ RPM	0,75 kW / 530 RPM	1,5 kW
Transport capacity	ca 650 kg/hr	ca 1400 kg/hr
Transport speed	21 mtr/ min	23 mtr/ min
Feedcontent per mtr (filling degree 50%)	450 gr/ mtr	1000 gr/ mtr
Diameter feeding tube	Ø 44,5 mm	Ø 60,0 mm
Max lenght feedline	120 mtr	300 mtr
Number of pans / 3 mtr section	3-4	3-4
<b>Bridex feedpan</b>		
Density females		12-14 Females/ Pan
Material		Polypropylene
Diameter		Ø 340 mm
Height of feedpan border		90 mm
Content (Content with reducer insert)		min 650 gr (500 gr) max 1600 gr (900 gr)
Number of feed places/ Grill openings		14
Dimensions of grill opening		width 45 mm, height 55-, 60-, 65- or 75 mm

V2008601