



Réflex[®]

- For rearing of broiler parent and grandparent stock (male and female)
- Flexible system, suitable for housing multiple groups in one house
- Optimal feed distribution up to ø25 meters spreading range
- Even distribution of birds in the house during feeding
- Uniform growth and bodyweight
- User-friendly system



Hoppers




- Round hopper
 - Discharges completely without any feed residue
 - Made in one piece
- Hexagonal hopper
 - Discharges completely without any feed residue
 - Limited transport volume, delivered unassembled in parts
- Spyglass and handles included
- Optional sensor set available to register an empty detection

Installation



- Supported systems
 - An extra handle and leg set on wheels ensure that the spin feeder can be easily moved
- Suspended systems
 - Space beneath spin feeder is free
- All spin feeders start dispensing feed simultaneously

Unique spinning head

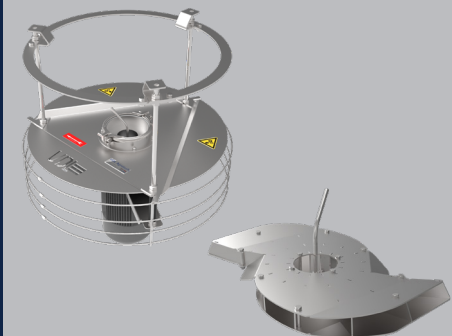

- New designed rotor protection ring with hidden supports
- Even distribution of feed over the entire circular spreading area
- Spreading area can be adjusted from $\varnothing 7$ - up to $\varnothing 25$ meter, by means of a frequency regulator

Technical specifications

Hopper	550 liter (± 350 kg)
Capacity	adjustable max. 60 kg/ min
Spreading diameter	adjustable max. $\varnothing 25$ meter
Weight supported systems	75 kg
Weight suspended systems	62 kg
Diameter (hopper)	$\varnothing 975$ mm
Height supported systems	2460 mm
Height suspended systems	1575 mm
Motor	0,55 kW (230/ 400V 3 phase) 930 rpm



Follow us on social media

VDL Agrotech

P.O. Box 8822, 5605 LV Eindhoven, the Netherlands
T: +31 (0)40 29 25 500, www.vdlagrotech.com, info@vdlagrotech.nl

